


Connections

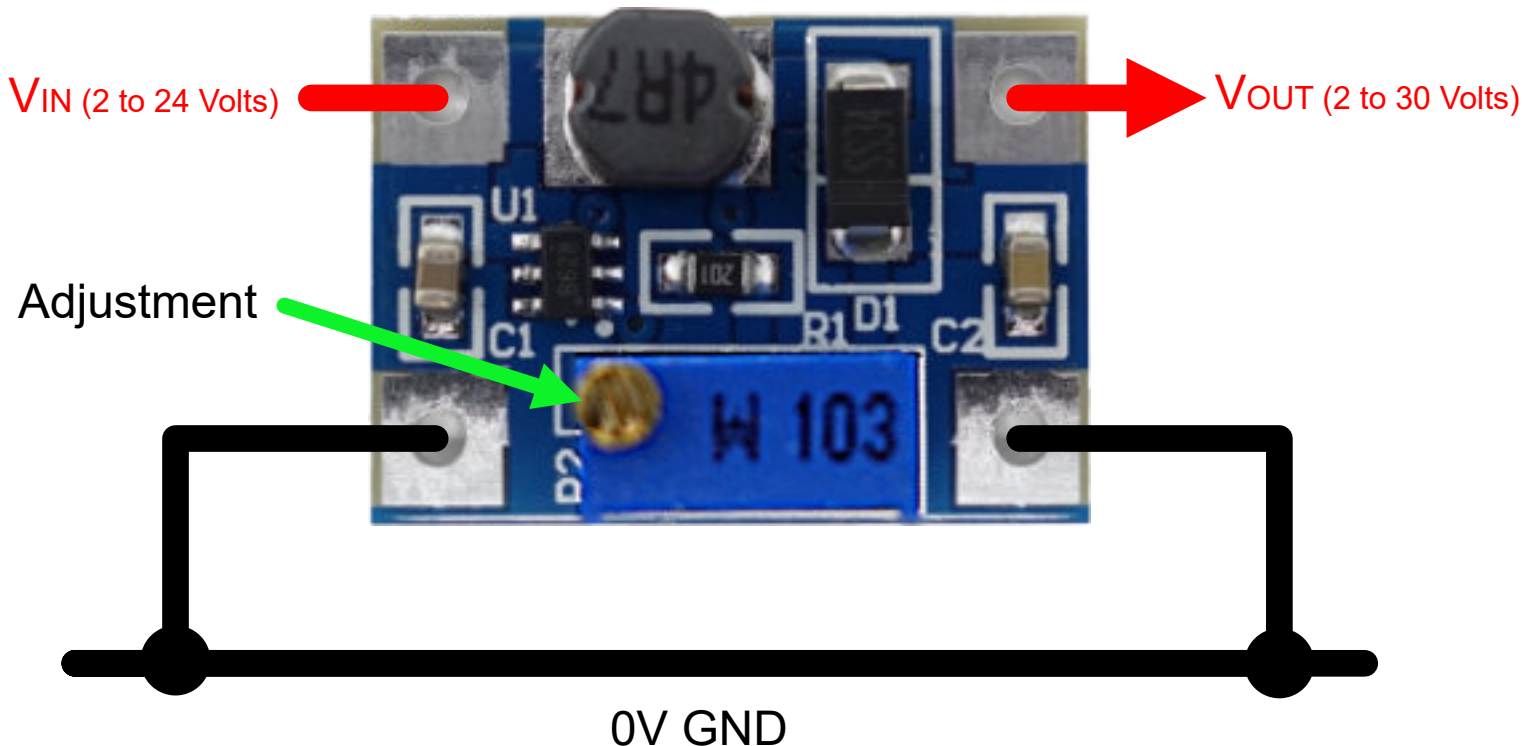

The input and output connections will need to be soldered. The bottom or the top of the board may be soldered.

Operation

The input voltage range is between 2 and 24 volts DC

The minimum output voltage is equal to the input voltage (i.e. if the input voltage is 5 volts then the minimum output voltage will be 5 volts.)

The maximum output voltage is approximately 30 volts.

To increase the output voltage, turn the preset anti-clockwise. Note that if the output voltage does not increase then it is because the setting is still below the minimum (input) voltage. Keep turning the preset until the output voltage increases to the required level

To decrease the output voltage, turn the preset clockwise. If the voltage does not change then it will be at the minimum level (which will be equal to the input voltage).

The maximum output current is 1.5 amps peak and 1.2 amps continuous.

Microminiatures Ltd

Unit 4 MB Site, Norwich Road, South Burlingham, Norwich, Norfolk NR13 4EZ
Telephone 01493 753 283 Fax 01493 751 724 Email sales@microminiatures.co.uk
www.microminiatures.co.uk